


## ARCO-NAV WIND SENSOR

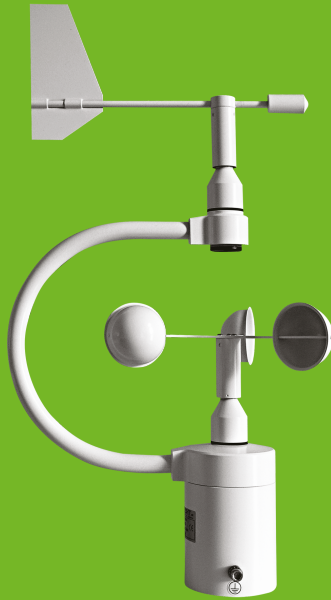

Combined sensor for off-shore applications

The classical combined sensor for off-shore applications. The robust design made from seawaterresistant materials and additional special coating guarantees high reliability and error-free long time use. The measured wind values will be given as NMEA-protocol serially every minute. Both under extreme weather conditions and on the high seas and applications close to the sea this sensor is the first choice.

- Approved combined sensor design for universal use
- Special coating for error-free long time use
- Best material quality and precision for low start-up values and wide measuring range
- Wear-free data collection for high accuracy and resolution of the measuring values
- Serial interface with NMEA 0183 protocol

### APPLICATIONS

- Professional naval meteorology
- Ship meteorology
- Coastal surveillance
- Crane systems
- Buoys
- Offshore wind turbines
- Robust industrial applications

Professional Line	ARCO-NAV
Id-No.	00.14581.110010
Meas. range wind direction	0...360°
Meas. range wind speed	0.3 ... 75 m/s
Accuracy wind direction	± 1°
Accuracy wind speed	± 2 % FS at 0.3 ... 50 m/s
Resolution wind direction	1°
Resolution wind speed	0.1 m/s
Output	serial RS 422, NMEA 0183 - Talker
Range of application	temperature -30 ... +70 °C • wind speed 0...80 m/s • 0...100 % r. h.
Supply voltage	Sensor: (10...28 V DC), 24 V DC, 50 mA (at V DC) • Heating: (20 ...28 V DC), 24 V DC, 800 mA
Housing	made of anodized seawater resistant aluminium, stainless steel • white coated
Accessories (order separately)	32.14581.060000: Sensor cable, 10 m, 5 pole

As of: 26.02.2023